

SubFloor Screw Foot Acoustic




SUBFLOOR SYSTEM

Build Height: 100 mm to the top of the joist.

Structure:

22 mm Chipboard
 45 mm SubFloor Wooden Joist
 SubFloor Screw
 SubFloor Screw Foot Acoustic

Base consisting of 160 mm solid concrete.

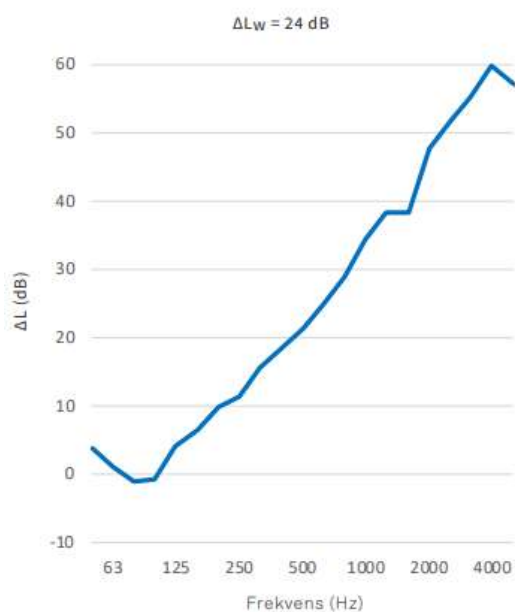

Type approval SubFloor system: SC0692-17

Type approval SubFloor, mechanically ventilated system: SC1436-17



BYGGVARUBEDÖMNINGEN

Email

info@flslimited.com

Telephone

+ 44 (0)7710 406906

Website

www.flslimited.com

SubFloor Screw Foot Acoustic 12




SUBFLOOR SYSTEM

Build Height: 115 mm to the top of the joist.

Structure:

22 mm Chipboard
 45 mm SubFloor Wooden Joist
 SubFloor Screw
 SubFloor Screw Foot Acoustic 12 mm

Base consisting of 160 mm solid concrete.

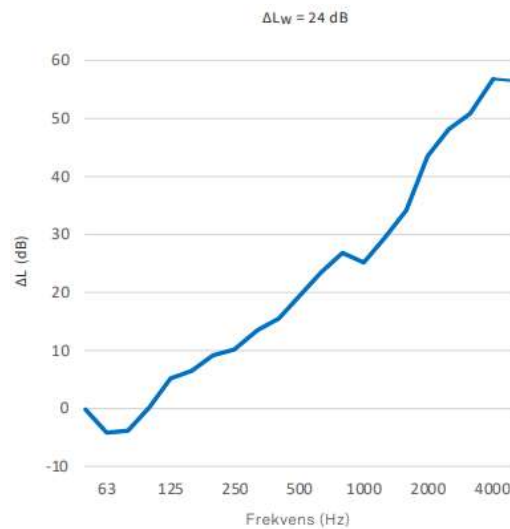

Type approval SubFloor system: SC0692-17

Type approval SubFloor, mechanically ventilated system: SC1436-17



BYGGVARUBEDÖMNINGEN

Email

info@flslimited.com

Telephone

+ 44 (0)7710 406906

Website

www.flslimited.com

SubFloor Screw Foot Acoustic 25




SUBFLOOR SYSTEM

Build Height: 115 mm to the top of the joist.

Structure:

- 22 mm Chipboard
- 45 mm SubFloor Wooden Joist
- SubFloor Screw
- SubFloor Screw Foot Acoustic 25

Base consisting of 160 mm solid concrete.

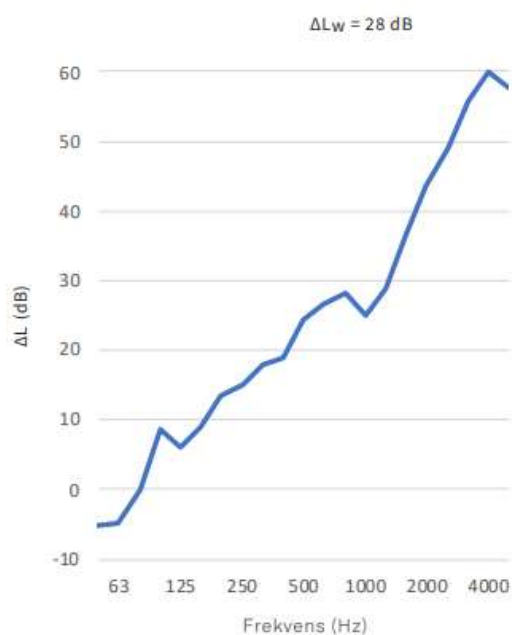

Type approval SubFloor system: SC0692-17

Type approval SubFloor, mechanically ventilated system: SC1436-17



BYGGVARUBEDÖMNINGEN

Email

info@flslimited.com

Telephone

+ 44 (0)7710 406906

Website

www.flslimited.com